

By docking this machine with our Automated Sushi Rice Making Machine, you can have this Sushi Wrapping Machine in low investment!!

Automated Sushi Wrapping Machine

PGS-SNB



Creating strong appeal of in-store showcase with the different colours of your individually wrapped sushi that includes Nigiri sushi, Maki sushi, Inari sushi, etc. All sushi are individual wrapped for hygiene purpose and quality assurance.




In case Seaweed roll, kindly consider to purchase seaweed roll wrapping machine.

POINT

Multiples range of sushi and rice products can be wrapped depending on your food menu and ideas.

- Preventing the ingredient's discoloration and keeping the freshness longer.
- Minimise wastage through maintaining freshness thus increasing sales profit.
- Enable customers to select individual type of sushi and quantity they preferred.

Dimensions

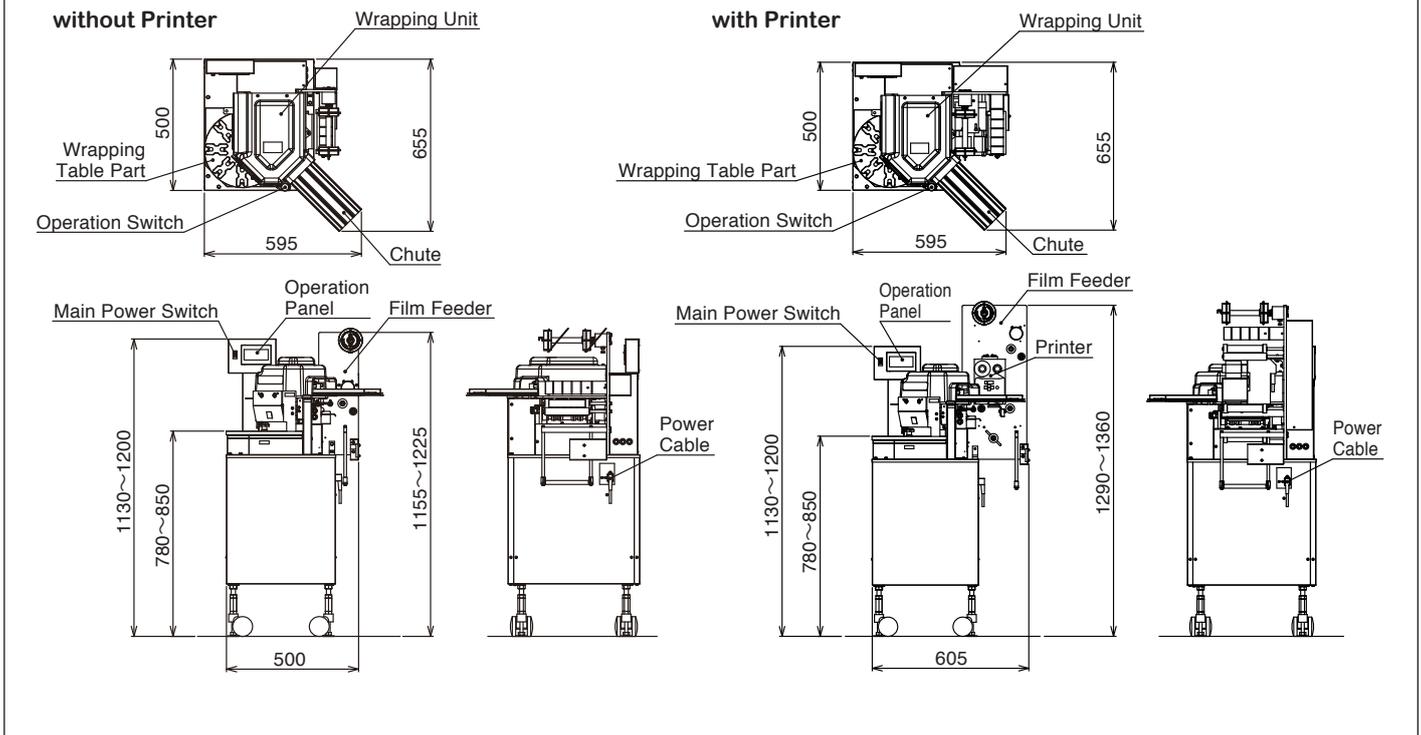

Specification

Model	PGS-SNB-JT (135mm Easy Open Film / Anti-fog Film)
Capacity	1200, 1600, 2000pcs/h (Adjustable)
Machine Dimensions	595Wx655Dx1155-1225Hmm (without Printer) 605Wx655Dx1290-1360Hmm (with Printer) *Height becomes +5mm when the adjuster fixed
Input	AC100V, 50/60Hz single phase
Power Consumption	350W (without Optional Items) 450W (with Optional Items)
Wrapping measurement	L68xW35xH30mm
Film Types	Easy Open Film (W135mm / Thickness 30μ), Anti-fog film (W135mm / Thickness 30μ)
Machine Weight	Approx. 86Kg (Not including optional items)
Optional Items	Film printing machine, Stand (380x310mm)

Features

- Compact design as width is only 60cm. Easy to move by the caster and secure by the stopper.
 - Touch panel motor enables easier operation.
 - Preventing the ingredient's discoloration and keeping the freshness longer.
 - Wrapping with easy open wrapping film for easier opening or Anti-fog film.
- 
- Production speed could be adjustable to 1200, 1600 and 2000pcs/h.
 - Wrapping film without the requirement of additional tools.
 - Easy to wash, disassemble and assemble of washable parts.

*Design and specification subject to change without notice.

*Please follow the instruction in the operation manual when handling the machine.

*While capacity expresses the machine's performance capabilities, it is predicated upon the machine being operated correctly.

Suzumo Machinery Co., Ltd. Global Business Division

2-23-2, Toyotamakita, Nerima-ku, Tokyo 176-0012, Japan

Tel. +81 3-3993-1407 Fax. +81 3-3993-1756

e-mail overseas@suzumo.co.jp URL <http://www.suzumokikou.com>

< Contact in North America >

Suzumo International Corporation

Head Office : 1815 W. 205th Street, Suite 101 Torrance, CA 90501 U.S.A.

Tel. +1 310-328-0400 Fax. +1 310-328-2700 e-mail sic@suzumokikou.com

East Office : 375 North Street, Unit K, Teterboro, NJ 07608 U.S.A.

Tel. +1 201-568-1900 e-mail sic@suzumokikou.com

< Contact in Singapore >

Suzumo Singapore Corporation Pte. Ltd.

421 Tagore Industrial Avenue #04-11 Tagore 8, Singapore 787805

Tel. +65 6254-2080 Fax. +65 6254 2086 e-mail sales@suzumo-sg.com